


Spring balancer 77001322


Spring balancer, payload range 1,5 - 3 kg, cable length 2,5 m, easy load setting, automatic locking

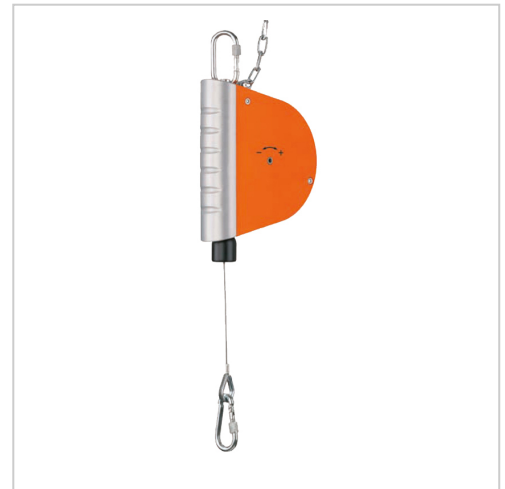

Product description

Spring balancer for lightweight and hand-operated tools that have to be kept ready in a predetermined position. High stability and quality. The casing is made of extremely shockproof special plastic, red-orange. The cable drum is made of abrasion-resistant plastic. High-strength steel cable with elastic cable stop buffer and lightweight carabiner for hanging the load. High-strength special mainspring. Easy load setting protected against operating error. Load mounting with secure carabiner. Hanging with screwing carabiner. The automatic locking of the cable windup makes it possible to block the device. Longer cables available on demand.

More images



Product properties

Fall protection	Existing, according to DIN 15112
Locking	Yes
Suspension	Screwing carabiner
Spring fracture protection	No
Weight in kg	0,9
Material casing	Shockproof special plastic
Cable stop	Yes, shock absorbing and adjustable
Series	7212
Series long	7212
Load attachment	Carabiner
Payload range in kg	1,5 - 3
Load setting	Easy setting - protected against operating error
Additional information	Do not use the locking for changing the load!

Dimensions

Cable length in m	2,5
-------------------	-----