


WPI 16 T WaterProfi-coupling SLW 16 Quick coupling

WaterProfi-quick coupling with shut-off valve and hose connection 5/8" (16 mm), brass nickel plated, DN 9


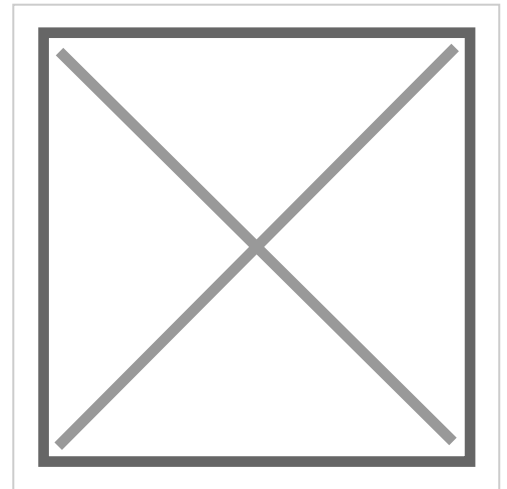


Product description

WaterProfi couplings are made entirely of nickel-plated brass, making them more robust and less prone to wear than comparable plastic products. To guarantee even easier operation, the [Quick-release couplings](#) have been fundamentally optimized. The new WPI series replaces the previous WPN and WS series and offers numerous advantages: The new, compact version is characterized by its extremely low weight. Thanks to a new industrial valve, the WPI series achieves 20% more flow and features a wrench flat on the connector for easier assembly. The sleeve contour and ball locking mechanism ensure significantly easier one-handed operation, making work considerably easier. The smooth surfaces reliably prevent dirt from accumulating and allow for effortless cleaning.

Of course, the quick-release couplings are compatible with standard plug-in profile types and can be ideally combined with the WaterProfi spray nozzle and watering device.

More images



Product properties

Shut-off	Quick coupling Single Shut-Off
Old order number	WS 16 TAB, WPN 16 TAB
Connection	Schlauchanschluss 16mm LW(5/8")
Seal	NBR/HNBR
Single-hand operation	Yes
Self-venting coupling	No
Flat-sealing	No
Weight in kg	0,129
Material	Brass nickel plated
Maximum working pressure in bar	PN 16 bar
max. temperature in °C	+95°C
Bore	DN 9
Professional recommendation	Water
Safety locking system	No
Water-resistant	Yes
Two-hand operation	No
Series	WPI
Series long	WPI

Dimensions

D mm	28
L mm	69
L1 mm	22,5
SW mm	27