


WPI 34 NA WaterProfi-plug G 3/4" AG

WaterProfi-plug with male thread (valve adaptor) G 3/4" AG, brass nickel plated, DN 9

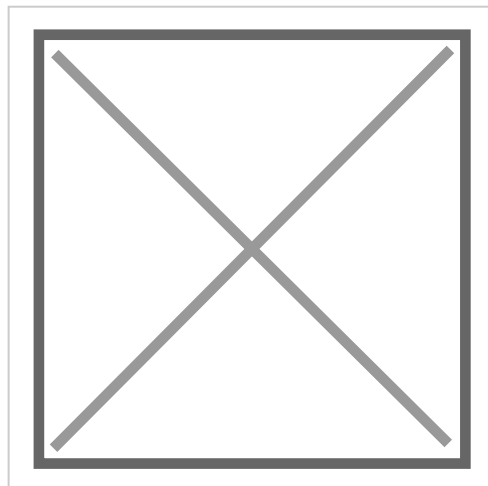


Product description

WaterProfi push-in nipples are made entirely of nickel-plated brass, making them more robust and less prone to wear than comparable plastic products. To guarantee even easier operation, the [Quick-release couplings](#) have been fundamentally optimized. The new WPI series replaces the previous WPN and WS series and offers numerous advantages: The new, compact version is extremely lightweight. Thanks to a new industrial valve, the WPI series achieves 20% more flow and features a wrench flat on the connector for easier assembly. The sleeve contour and ball locking mechanism ensure significantly easier one-handed operation, making the job considerably easier. The smooth surfaces reliably prevent dirt from accumulating and allow for effortless cleaning.

Naturally, the quick-release couplings are compatible with standard market standards. The plug-in profile types are compatible and can be ideally combined with the WaterProfi spray nozzle and the watering device.

More images



Product properties

Shut-off	Plug Straight-Through
Old order number	WS 34 NA, WPN 34 NA
Connection	Male thread 3/4"
Seal	NBR/HNBR
Single-hand operation	Yes
Flat-sealing	No
Weight in kg	0,076
Material	Brass nickel plated
Maximum working pressure in bar	PN 16 bar
max. temperature in °C	+95°C
Bore	DN 9
Professional recommendation	Water
Safety locking system	No
Water-resistant	Yes
Two-hand operation	No
Series	WPI
Series long	WPI

Dimensions

L mm	41
L1 mm	10,5
L2 mm	24
SW mm	30