


Balancer 77001016

Balancer, payload range of 5,2 to 6,5 kg, cable length 1,6 m, simplified load setting

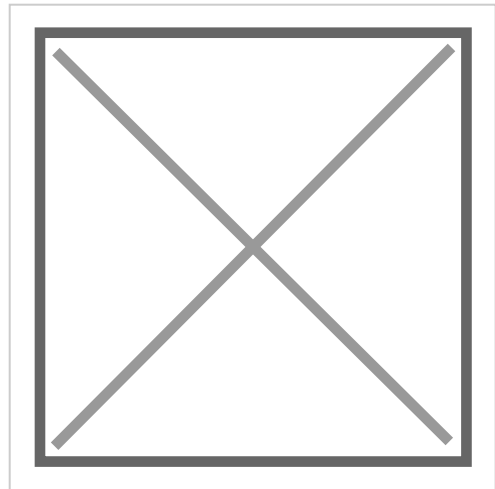

Product description

Sensitive device for production and installation - can be integrated into machines.

Hanging with a turnable screwing carabiner.

The casing is made of extremely shockproof plastic, red-orange.

High-strength steel cable with elastic cable stop buffer and carabiner for hanging the load.

Infinitely variable load setting through adjusting screw.

The cable length is infinitely variable adjustable through a cable lock and the working stroke can be infinitely variable shortened with a cable clamp.

Riveted special mainspring simplifies the load setting.

Longer cables available on demand.

More images

Product properties

Fall protection	Existing, according to DIN 15112
Locking	No
Suspension	Turnable screwing carabiner
Spring fracture protection	Yes
Weight in kg	1,5
Material casing	Shockproof special plastic
Cable stop	Yes, shock absorbing and adjustable
Load attachment	Secure screwing carabiner
Payload range in kg	5,2 - 6,5
Load setting	Allen key
Series	8228

Dimensions

Colour	Orange
Cable length in m	1,6