


## Datasheet of 9064108 – IN-LINE CHECK VALVE SERIES VNR L thread-pipe 1/8-Ø6

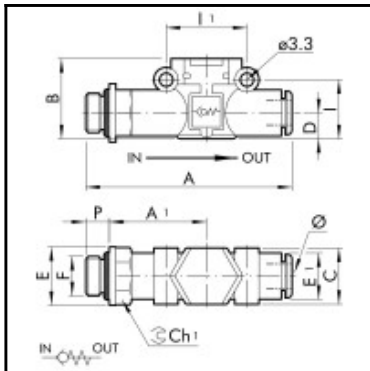

### Description

Inline check valves, thread-pipe, 1/8-Ø6, 0,5 – 12 bar, 320 NI/min flow rate

The VNR L check valve belongs to the LINE ON LINE® family, which means it can be connected to all the other components in series or in parallel.

Available in the version for pipe-pipe connection with two push-in fittings, and in the version for thread-pipe connection with a brass nickel-plated male thread and a push-in fitting. It is still the only check valve with holes for wall mounting

### Details

Flow rate in l/min:	320 NI/min (at 6.3 bar, ?P=1 bar)
F:	1/8
B:	20
C:	14,7
Ch1:	12
E:	14
E1:	11,4
Medium suitability:	Filtered, lubricated or unlubricated, compressed air. Lubrication, if used, must be continuous.
Working temperature:	-20 – +60 °C
Working pressure:	0,5 – 12 bar
Recommended pipe:	Rilsan PA 11 – Nylon 6 – Polyamide 12 – Polypropylene.
Weight in kg:	0,027

### Dimensions

Connection 1:	Male thread G 1/8
Connection 2:	Push-in fitting 6 mm outside calibrated
F:	1/8
Ø:	6
A:	58,5
A1:	27,8
B:	20
C:	14,7
Ch1:	12
E:	14
E1:	11,4
I:	14,6
I1:	20
P:	6