
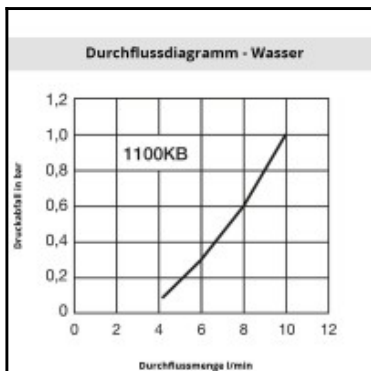


Datasheet of 1100SBIW10MPC Plug with male thread

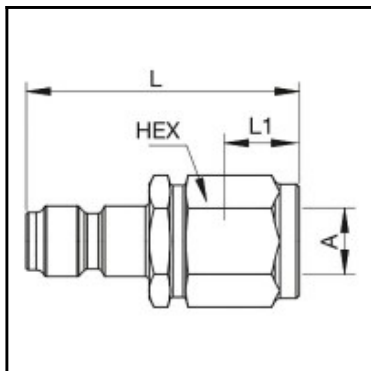

Description

Plug double shut-off, Male thread G 1/8, NW 4,8, <20 bar, brass chrome plated

Robust design with small dimensions. Series 1100 is used mainly for applications in the area of compressed air and liquids. Optimally suited to smaller pneumatic systems and to compressed air tools with a consumption of up to 900 litres per minute. Coupling systems with two-hand operation, i.e. both hands are required when connect/disconnect.

Details

Series:	1100
Old order number:	11410 MN
Series long:	1100SB
Bore area in mm²:	24
Advantages:	Robust structure. Small dimensions.
Compatibility:	Tema Design
Working pressure:	PB = 20 bar, maximum static working pressure with safety factor of 4 to 1.
Working temperature:	-20°C up to +100°C (NBR) -40°C up to +120/150°C (EPDM) -15°C up to +200°C (FKM) depending on the medium.
Shut-Off:	Plug Double Shut-Off
Connection:	Male thread G 1/8
Connection description:	Male thread G 1/8
Material:	brass, chrome plated
Material description:	Brass CuZn39Pb3 2.0401
Seal description:	Nitrite-butadiene rubber
Surface:	chrome plated
Material connection:	brass, chrome plated
Material valve body:	brass, chrome plated
Material sleeve:	brass, chrome plated
Material seal:	NBR
Weight in kg:	0,02
Self-venting coupling:	No
Safety locking system:	No
Single-hand operation:	No
Two-hand operation:	Yes
Ultra-FLO-valve:	No
Water-resistant:	Yes
Flat-sealing:	No
Suitable breath / respiratory protection:	No
Pressure eliminator:	No
Hydraulics:	No
Pneumatics:	Yes
Mould coupling:	No

Dimensions

L mm:	36
L1 mm:	8
SW mm:	15