
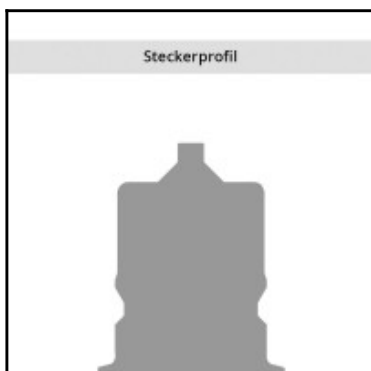
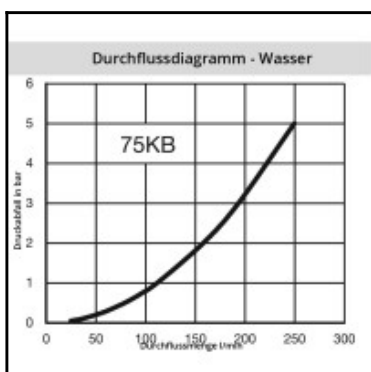
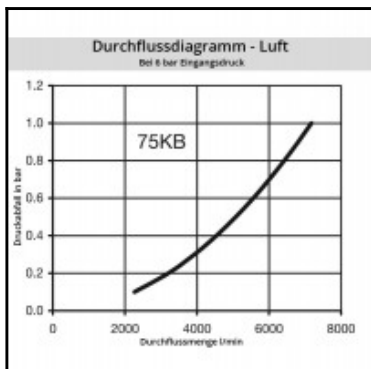


Datasheet of 75SBIW26MEN Plug with female thread

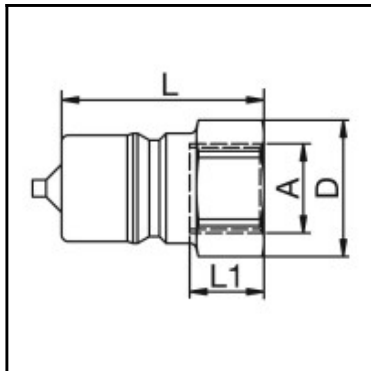

Description

Plug double shut-off, female thread G 3/4, nominal diameter 13, <100 bar, brass nickel plated, seal EPDM

Coupling series 75kb with plug profile compliant with ISO 7241-1 series B. Particularly suited to use with liquid medio. Coupling system with two-hand operation, i.e. both hands are required when coupling/uncoupling. The coupling series stands out for its high flow rates against a low pressure drop.

Details

Series:	75
Series long:	75SB
Bore in mm:	13
Bore area in mm²:	133
Advantages:	Particularly suited to use with liquid medio. Double O-ring sealing.
Working pressure:	PB = 100 bar maximum static working pressure with safety factor 4 to 1.
Working temperature:	-20°C up to +100°C (NBR) -15°C up to +200°C (FKM) depending on the medium.
Shut-Off:	Plug Double Shut-Off
Connection:	Female thread 3/4"
Connection description:	Female pipe thread of Whitworth form ISO 228 3/4"
Connection type:	Female thread
Material:	Brass nickel plated
Material description:	Brass CuZn39Pb3 2.0401 (except sleeve)
Seal description:	Ethylene-propylene-diene rubber
Surface:	nickel plated
Material valve:	Brass
Material spring snap ring:	stainless steel AISI 301
Weight in kg:	0,2551
Self-venting coupling:	No
Safety locking system:	No
Single-hand operation:	No
Two-hand operation:	Yes
Ball locking:	No
Pin lock:	No
Ultra-FLO-valve:	No
Vacuum suitable:	Yes
Water-resistant:	Yes
Flat-sealing:	No
Suitable breath / respiratory protection:	Yes
Pressure eliminator:	No
Hydraulics:	No
Pneumatics:	Yes
Standard product:	Yes
Mould coupling:	Yes

Dimensions

Connection A:	G 3/4
L mm:	60
L1 mm:	24
SW mm:	36