

27KBTF13EVX Quick coupling with hose barb




Quick coupling double shut-off, hose barb 13mm (1/2), nominal diameter 10, <35 bar, stainless steel AISI 316 L, seal FKM



Product description

1/2 universal industrial coupling with standard European profile for use with large pneumatic consumers. Coupling system with single-hand operation. UltraFlo valve for optimum flow and low pressure drop. The series stands out for its robust design, extremely high flow and long service life even with the harshest use. The collar design minimises damage to the valve body.

More images

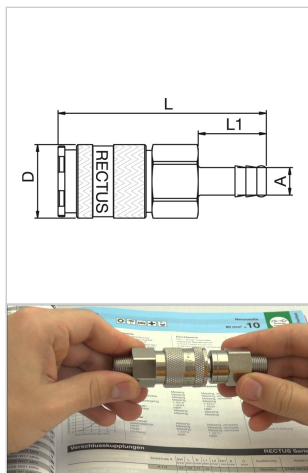

Product properties

Shut-off	Quick coupling Double Shut-Off
Connection	Hose barb 13mm LW(1/2")
Connection description	Hose barb 13mm LW(1/2")
Connection type	Hose barb
Suitable breath / respiratory protection	No
Seal	FKM
Seal description	Fluororubber
Working pressure	35 bar maximum static working pressure with safety factor 4 to 1.
Pressure eliminator	No
Single-hand operation	Yes
Self-venting coupling	No
Flat-sealing	No
Mould coupling	No
Weight in kg	0,1
Hydraulics	No
Ball locking	Yes
Material	stainless steel AISI 316 L
Material description	stainless steel 1.4404
Bore area in mm ²	80
Bore in mm	10
Surface	blank finish
Pneumatics	Yes
Series	27
Series long	27KB
Safety locking system	No
Standard product	No
Pin lock	No
Working temperature	-20°C up to +100°C (NBR) -40°C up to +120/150°C (EPDM) -15°C up to +200°C (FKM) depending on the medium.
Ultra-FLO-valve	No
Vacuum suitable	No
Advantages	One-hand operation. Low pressure Drop. The collar design minimises damage to the valve body. UltraFlo valve.
Water-resistant	No
Material connection	stainless steel AISI 316 L
Material seal	Viton®
Material sleeve	stainless steel AISI 316 L
Material spring snap ring	Stainless steel AISI 316Ti
Material balls/pins	Stainless steel AISI 316
Material valve	stainless steel AISI 316 L
Material valve body	stainless steel AISI 316 L
Two-hand operation	No

Dimensions

Connection A	13 mm
D mm	27
L mm	76,5
L1 mm	25
SW mm	24