


Balancer 77001028

Balancer, payload range of 13 to 17 kg, cable length 2 m, working stroke infinitely variable adjustable

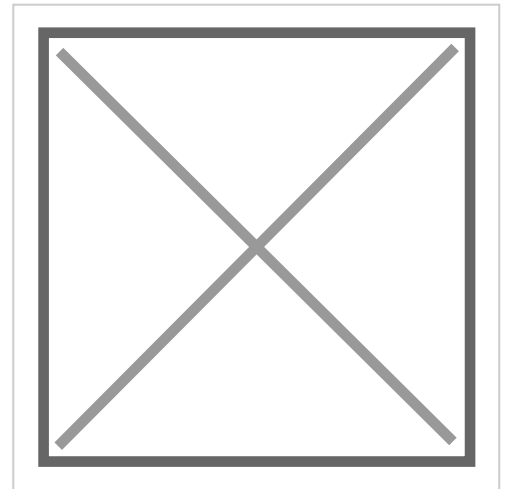

Product description

Geeignet für die Handhabung von leichten und mittelschweren Lasten.

Für raue Einsatzfälle mit vielen Auszugszyklen.

Das Gehäuse ist aus extrem schlagfestem Kunststoff, rot-orange.

Frei dreh- und schwenkbarer Sicherheitshaken für die Aufhängung.

Hochfestes Stahlseil mit elastischer Seileinzugsbegrenzung und Schraubkarabinerhaken zum Anhängen der Last.

Das Seil ist über ein Seilschloss stufenlos in der Länge zu verstellen und durch eine Seilklemme ist der Arbeitshub stufenlos zu verkürzen.

Die vernietete Spezial-Triebfeder ermöglicht eine stufenlose Traglasteinstellung über eine Einstellschnecke.

Auf Anfrage ist ein längeres Seil lieferbar.

More images

Product properties

Fall protection	Existing, according to DIN 15112
Locking	No
Suspension	Freely turnable and traversable screwing carabiner
Spring fracture protection	Yes
Material casing	Shockproof special plastic
Cable stop	Yes, shock absorbing and adjustable
Load attachment	Screwing carabiner
Payload range in kg	13 - 17
Load setting	Through adjusting screw with over-twist protection
Series	8230
Weight in kg	4,1

Dimensions

Colour	Orange
Cable length in m	2